


Payment Terminal "Gaga-Go" 885



885

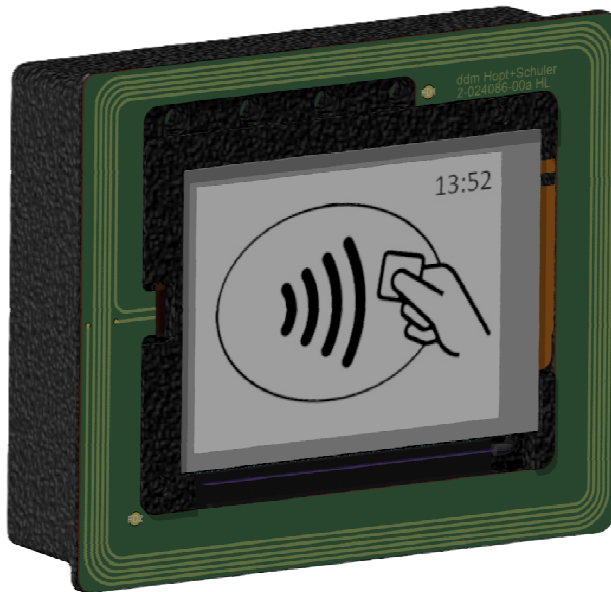

885

AUSFÜHRUNG

- + Kompakter RFID-Bezahlleser mit vielen Erweiterungen
- + Einfache Integration, platzsparender Einsatz und eine hohe Flexibilität bei der Auswahl der Funktechnologie
- + Unterstützt die gängigsten RFID Kartenstandards der Frequenz 13,56 MHz sowie die ISO-Standards ISO 14443, ISO 15693 und ISO 18092
- + Integriertes Farbdisplay (optional)
- + RS232 und USB Schnittstelle
- + Anpassungen nach kundenspezifischen Anforderungen möglich

CONSTRUCTION

- + Compact RFID payment reader with many extensions
- + Easy integration, space-saving use and high flexibility in the choice of RFID technology
- + Supports the most common RFID card standards of the frequency 13.56 MHz as well as the ISO standards ISO 14443, ISO 15693 and ISO 18092
- + Integrated color display (optional)
- + RS232 and USB interface
- + Customization according to customer specific requirements possible

ABMESSUNGEN

70 x 60 x 18,6 mm

DIMENSIONS

70 x 60 x 18,6 mm



MECHANISCHE KENNWERTE | MECHANICAL CHARACTERISTICS

ALLGEMEIN GENERAL	Gewicht	150 g	<i>Weight</i>
	Brandklasse	UL 94 V0	<i>Flame rating</i>

ELEKTRISCHE DATEN | ELECTRICAL DATA

ALLGEMEIN GENERAL	Versorgungsspannung	5V (RS232) 5V (USB)	<i>Power requirements</i>
	Stromverbrauch	max.: 1,5 A	<i>Current consumption</i>

**SCHNITTSTELLEN
INTERFACES**

RS232 USB 2.0 Type C TCP / IP over RS232 (SLIP)
Extension board with: SPI / I ² C / Ethernet / MDB / LTE / WiFi / Bluetooth/ 4x SAM

RFID	Frequenz Antenne	13.56 MHz Integrated Antenna	<i>Frequency Antenna</i>
-------------	---------------------	---------------------------------	------------------------------

DISPLAY (optional)	Display Type	2.0 Zoll / inch	<i>Display type</i>
	Bildschirmfarbe	TFT IPS	<i>Display color</i>
	Helligkeit	Colors 262K	<i>Brightness</i>
	Auflösung	500 cd /m ² 320 x 240	

AUDIO	Summer	Integrated multiy-frequency	<i>Buzzer</i>
--------------	--------	-----------------------------	---------------

UMGEBUNGSBEDINGUNGEN | ENVIRONMENTAL CONDITIONS

KLIMATISCHE BEDINGUNGEN	Lagertemperatur	- 30°C ... + 70°C	<i>Storage temperature</i>
	Betriebstemperatur	- 25°C ... + 60°C <i>(with Display -20 °C ... + 60°C)</i>	<i>Operating temperature</i>
CLIMATIC CONDITIONS	Luftfeuchtigkeit (relativ)	10 ... 90%	<i>Humidity (relative)</i>
	Luftdruck	70 ... 106 kPa	<i>Air pressure</i>

RFID PROTOKOLLE | RFID PROTOCOLS

ISO 14443 A	MIFARE CLASSIC MIFARE Mini MIFARE DESFire MIFARE DESFire Light MIFARE Ultralight
ISO 14443 B	Calypso
ISO 15693	iCODE

CERTIFIED PAYMENT CARDS	VISA payWave Mastercard Contactless American Express Discover Additional kernels available (optional)
------------------------------------	-------------------------------------------------------------------------------------------------------------------

PAYMENT APPLICATION	SDK provided for custom payment application development Optionally provided by ddm: nexo Payment Application
----------------------------	-----------------------------------------------------------------------------------------------------------------

Certification	EMV Level 1 EMV Level 2 PCI PTS 6.x SRED FCC CE RoHS
----------------------	-------------------------------------------------------------------

Anschrift | Address

Firma:
Company:

Datum:
Date:

Adresse:
Address:

Tel.:
Phone:

Name:
Name:

Fax:
Fax:

Kundenr.:
Customer No.:

E-Mail:
E-Mail:

Bestellschlüssel | ordering code

Muster und 3D-Daten | Samples and 3D Data

Bitte nutzen Sie die nebenstehenden Links und QR-Codes, um Ihre individuellen Muster und 3D-Daten anzufordern.

www.hopt-schuler.com



sales@hopt-schuler.com



Please use the links and QR-codes beside to require your specific samples and 3D Data.